

## MODEL NO. 60076 Chain Walk - 8'

### PARTS LIST

DESCRIPTION	No. REQ'D	PART NUMBER
Plastisol-coated chain	2	301905
<b>Hardware Complete</b>	1	302560
Swing Hanger Pendulum	4	301168*
5" O.D. Turned Swivel Clamp	4	302572*
1/4" x 3/4" Drive Rivet	4	168449*
3/8" Heavy Hex Nut	4	804200*
3/8" x 1 1/2" P.B.H.C.S. w/Patch	4	812053*
5/16" Lock Nut	4	804359*
3/8" x 2 1/2" Shoulder Bolt	4	802731*

*Unless Otherwise Specified, All Units of Measure are Each  
\* Included in Hardware*

**Warning: Small parts and hardware items may present a potential choking hazard. Promptly remove all unused parts from play area.**

### SPECIFICATIONS:

Clamps are cast from a 356 high-strength aluminum alloy with a baked on polyester powder-coated finish. Chains are pre-cut to specified size from 5/16" 5/0 proof-coil galvanized chain and Plastisol-Coated to eliminate pinch-points.

All hardware is stainless steel.

Weight: 22 lb. / 10.0 kg


### INSTALLATION INSTRUCTIONS:

1. Locate the Upright Posts intended to receive the Chain Walk by referring to your overhead drawing. They should be spaced 8' apart lengthwise.
2. Attach Plastisol-coated chain to Upright Posts using Turned Swivel Clamps, Pendulum as shown in assembly diagram. The chain should be tight and straight. Cut off excess chain if necessary.
3. When the structure is finished and satisfactory, install Drive Rivets in all clamps to ensure clamps can not slide down posts. See Clamps sub-assembly sheet. It is very important that all Drive Rivets be installed prior to allowing use of equipment, as clamps are not designed to support substantial weight without them. Eliminate sharp points and sharp edges (burring) on installed hardware like bolts, nuts, etc.
4. Install resilient surfacing material within the use zone of play structure in accordance with ASTM specifications F1292 appropriate for the fall height of each structure. Refer to the Safety Guidelines.

### MAINTENANCE PROCEDURE:


Periodically check hardware for tightness, and tighten as necessary. Always check all parts for breakage or wear, and immediately put equipment out of service until any faulty parts found are repaired or replaced. Check for rust, paint loss and touch-up if necessary with paint. Check for welded areas and verify integrity. Check chains for integrity and corrosion. Check connections for excessive wear and replace immediately if necessary. Check Plastisol-coating for bare spots and touch-up with Plastisol if necessary. Check periodically resilient surfacing for appropriate depth and remove extraneous materials that could cause injury, infection, or disease. Maintain detailed installation, inspection, maintenance, and repair records for each public-use playground equipment.

## MODEL NO. 60076 Chain Walk - 8'

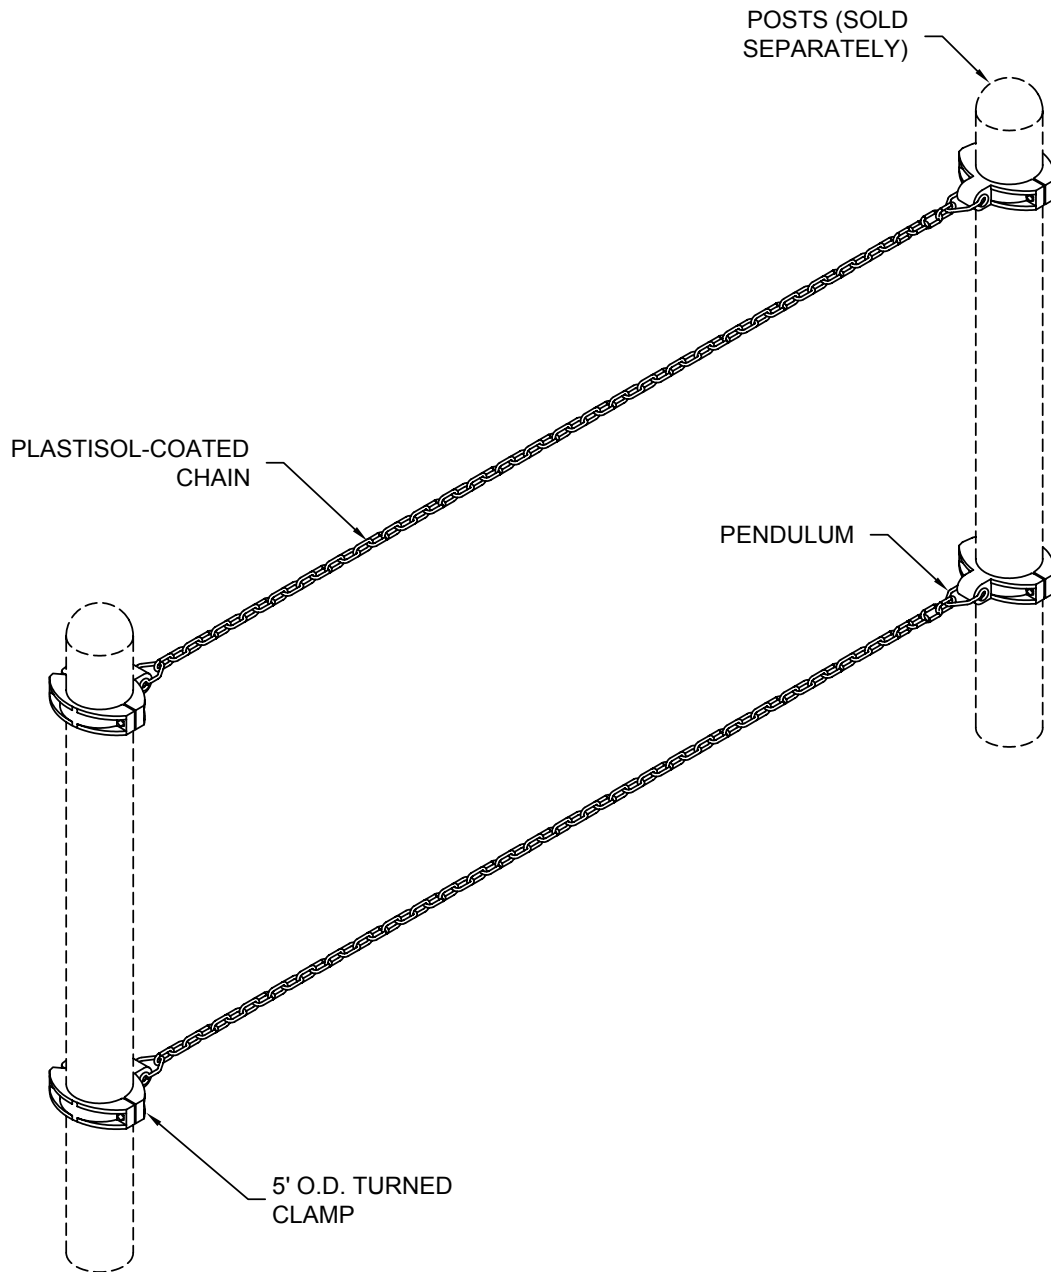


FINISHED ASSEMBLY

## MODEL NO. 60076 Chain Walk - 8'

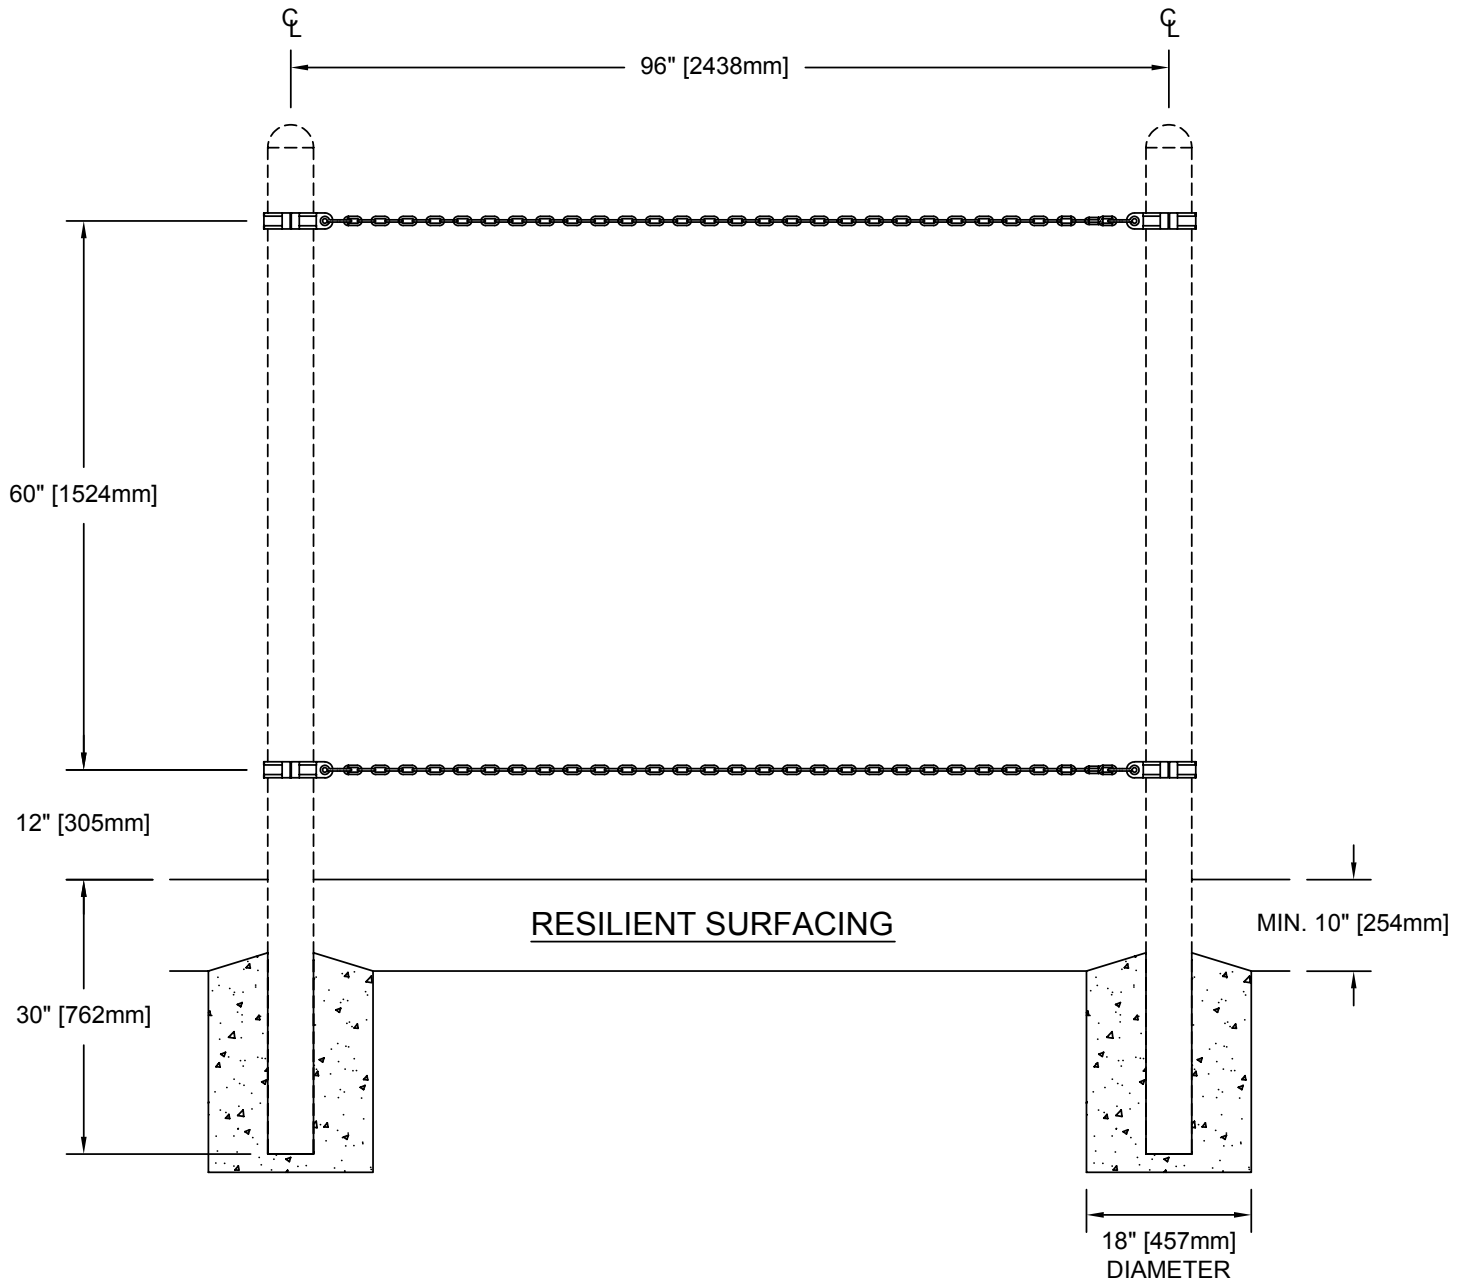

ELEVATION VIEW

## MODEL NO. 60076 Chain Walk - 8'

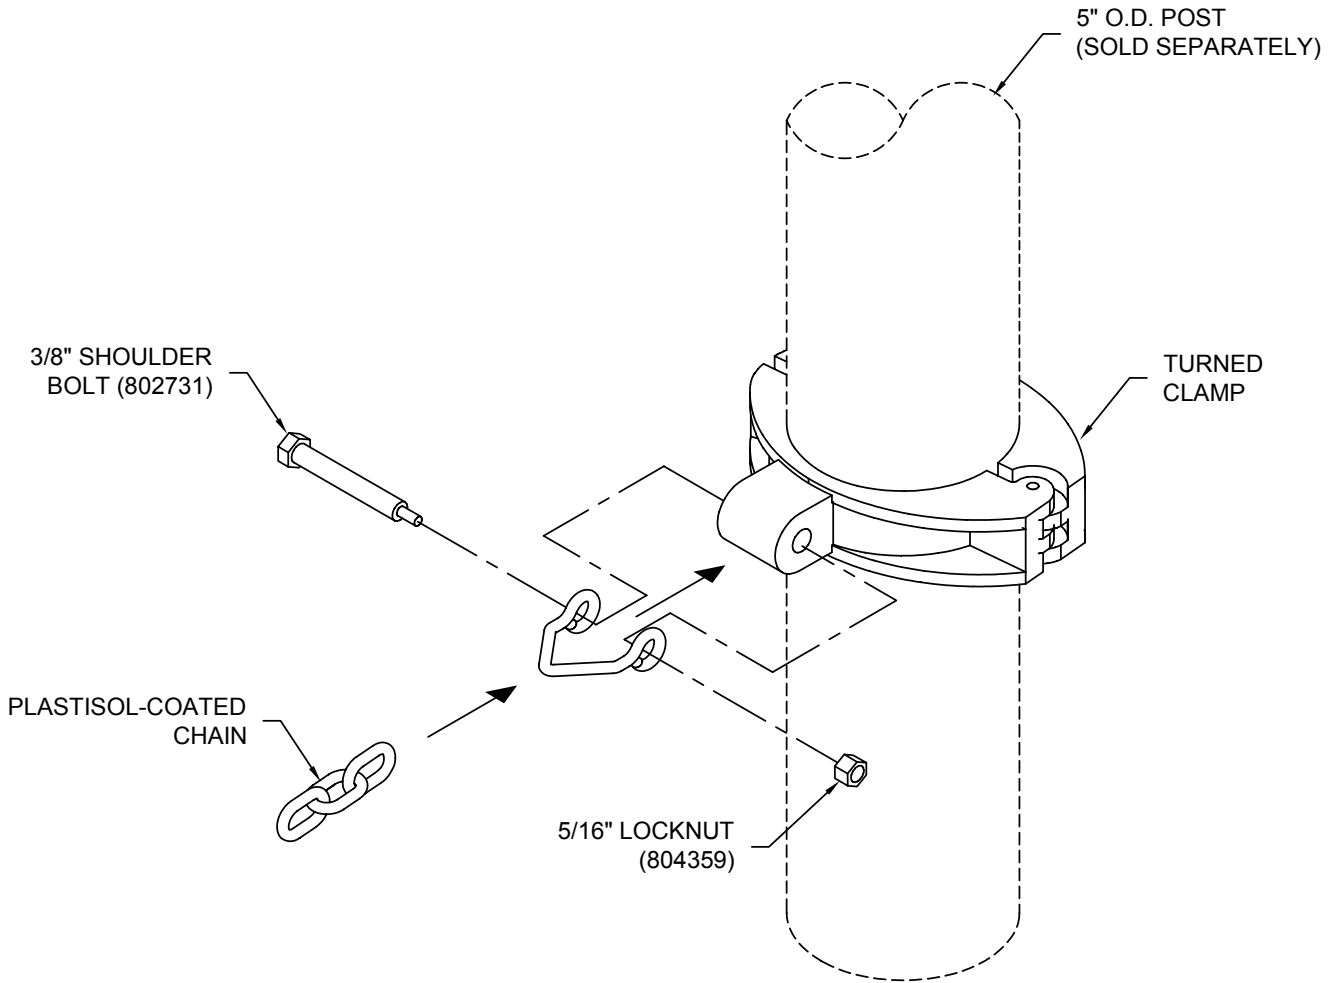

### CHAIN WALK ASSEMBLY