

MODEL NO. 60047 Seat for Two and Table

PARTS LIST

DESCRIPTION	No. REQ'D	PART NUMBER
22" Round Table Panel	1	302361
Seat Panel	1	302366
Seat Support Beam	1	302373
Table Support Post	1	302378
Hardware Complete	1	302322
5" O.D. Half Clamp	2	301001*
1/4" x 3/4" Drive Rivet	2	168449*
3/8" Barrel Nut	8	804804*
3/8" Flatwasher	16	817410*
3/8" x 1 1/4 P.B.H.C.S. w/ Patch	4	812051*
3/8" x 3/4" P.B.H.C.S. w/ Patch	8	812052*
3/8" Locknut	4	804353*

**Unless Otherwise Specified, All Units of Measure are Each
*Included in Hardware**

Warning: Small parts and hardware items may present a potential choking hazard. Promptly remove all unused parts from play area.

SPECIFICATIONS:

Clamps are cast from high-strength 356-aluminum alloy with a baked on polyester powder-coatde finish. Seat Support Beam is a 1 5/8" O.D. 14-gauge galvanized tube welds to 5" O. D. Half Clamps. Table Support post is fabricated from 2 3/8" O.D. galvanized steel tube and 3/16" thick steel plate for attachment. All parts using only stainless steel welds and polyester powder-coated finish after fabrication.

All hardware is stainless steel.

Weight: 69 lbs. / 31 kg.

INSTALLATION INSTRUCTIONS:


1. Locate, measure and dig footings for posts. Refer to your overhead drawing.
2. Attach Seat Support Beam to Seat Panel using 3/8" x 3/4" P.B.H.C.S. with Patch, 3/8" Flat Washers and 3/8" Barrel Nuts as shown in detail drawing. Fasten this assembly to Upright Posts using 5" O.D. Half Clamps , 3/8" x 1 1/4" P.B.H.C.S. with Patch, 3/8" Flat Washers and 3/8" Locknuts as shown.
3. Attach Table panel to Support Post using 3/8" x 3/4" P.B.H.C.S. with Patch, 3/8" Flat Washers and 3/8" Barrel Nuts as shown.
4. When the entire structure is plumb and level, fully tighten all fasteners and pour concrete footing within 4" to the top and taper away from support posts to allow water drainage. Allow curing at least 48 hours before use.
5. When the assembly is finished and satisfactory, install Drive Rivets in all clamps to ensure clamps cannot slide down posts. See Pipe Clamp sub-assembly sheet. **It is very important that all Drive Rivets be installed prior to allowing use of the equipment, clamps are not designed to support substantial weight without them.** Install resilient surfacing material within the use zone of play structure in accordance with ASTM specifications F1292 appropriate for the fall height of each structure. Refer to the Safety Guidelines.

MODEL NO. 60047 Seat for Two and Table


MAINTENANCE PROCEDURE:

Periodically check hardware for tightness, and tighten as necessary, also check if the entrapments and protrusions still satisfactory. Always check all metal parts for corrosion, paint peeling and touch up if necessary. Check all plastic parts for crack, breakage or wear, and immediately put equipment out of service until any faulty parts found are repaired or replaced. Check periodically resilient surfacing for appropriate depth and remove extraneous materials that could cause injury, infection, or disease. Maintain detailed installation, inspection, maintenance, and repair records for each public-use playground equipment.


MODEL NO. 60047 Seat for Two and Table

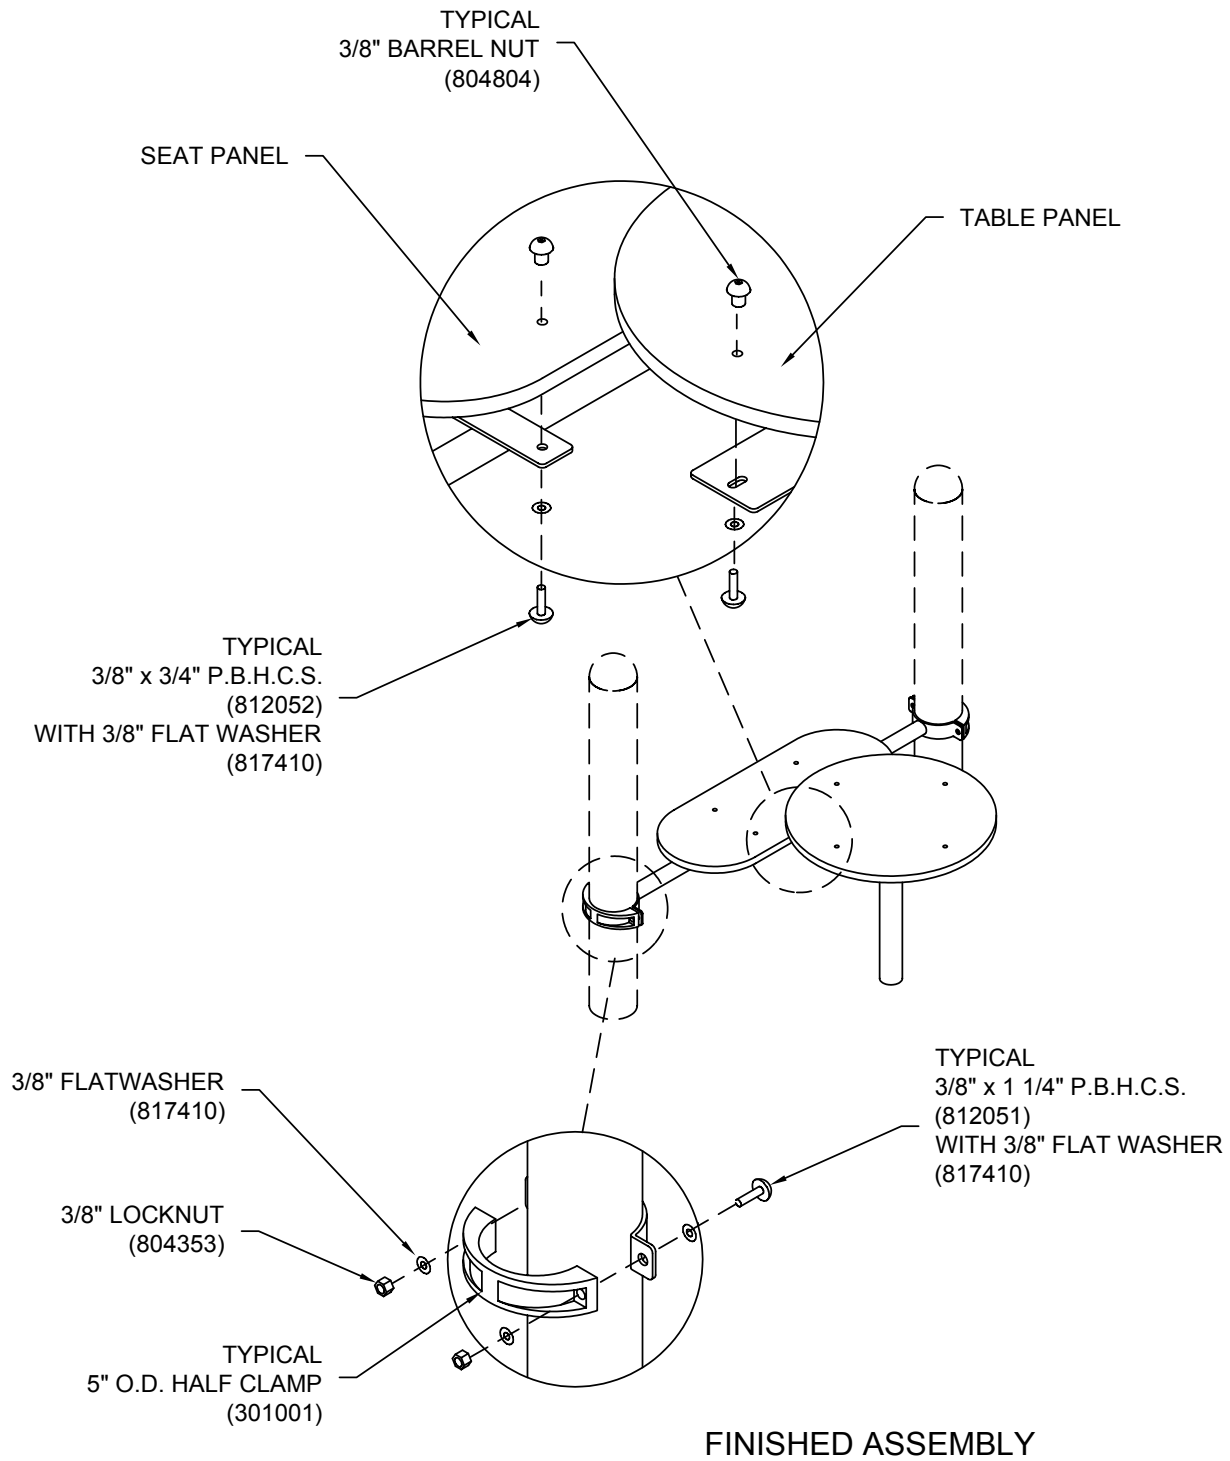

MODEL NO. 60047 Seat for Two and Table

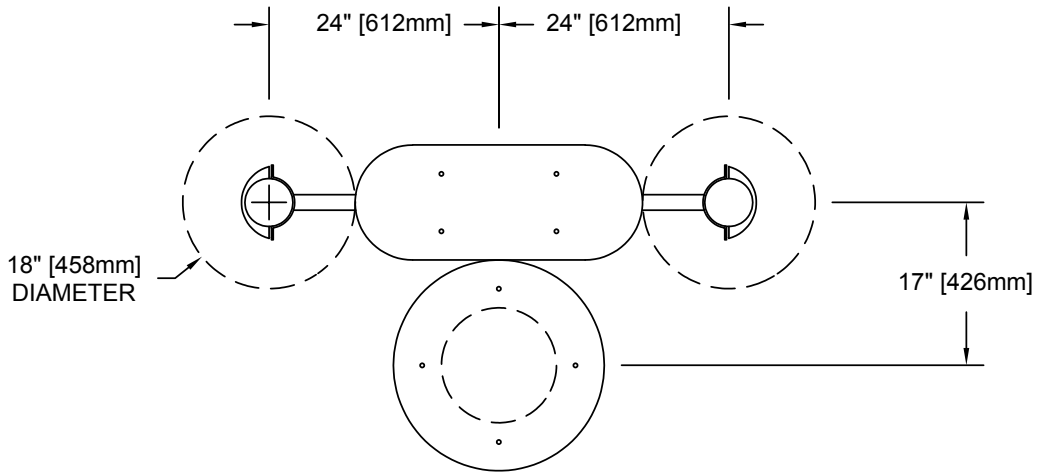

PLAN VIEW

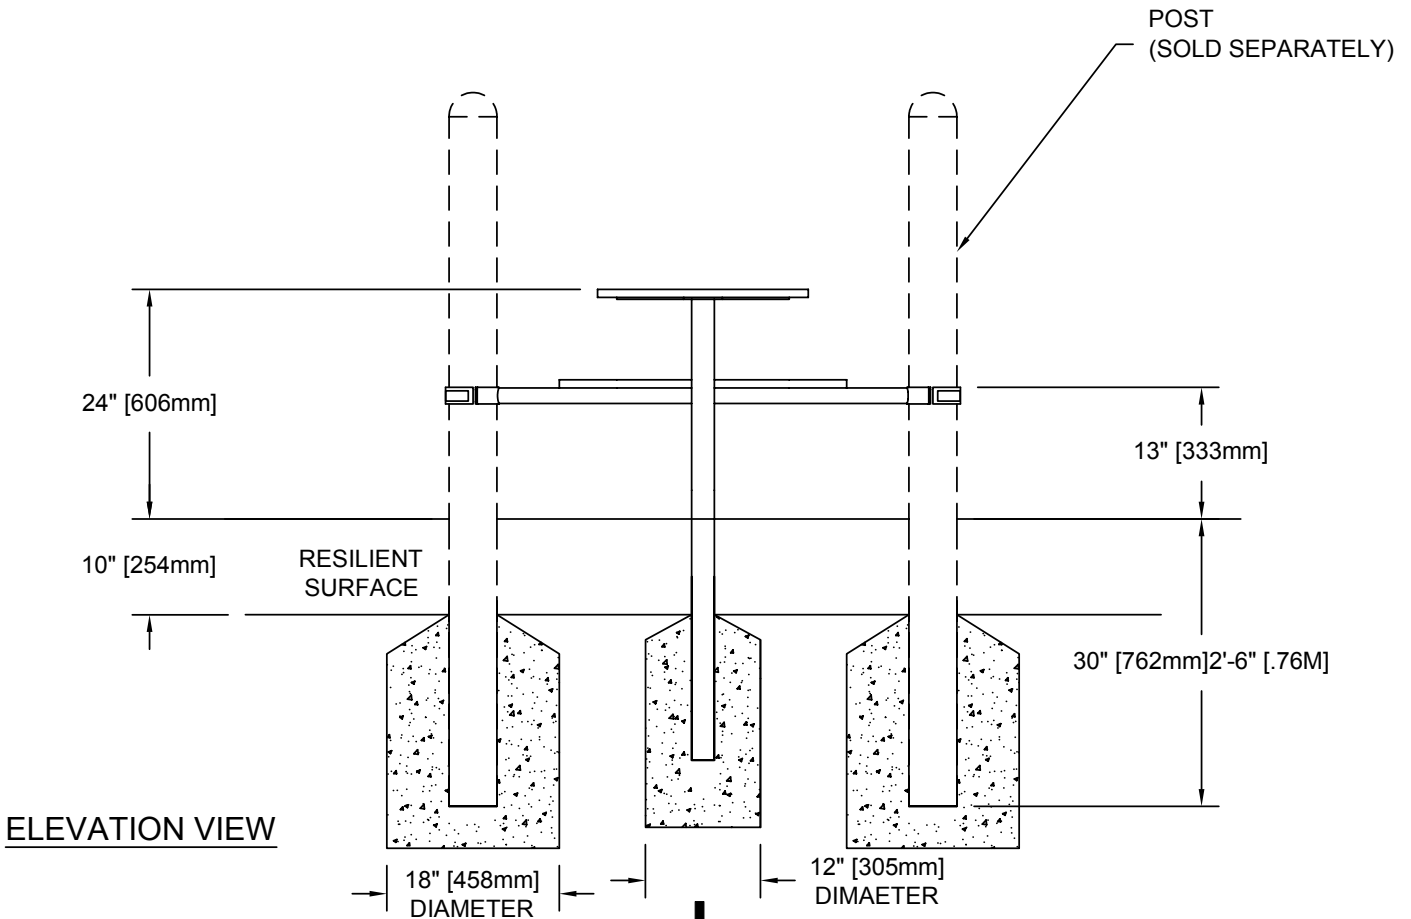

ELEVATION VIEW